


219.00 EUR
incl. 19% VAT, plus [shipping](#)

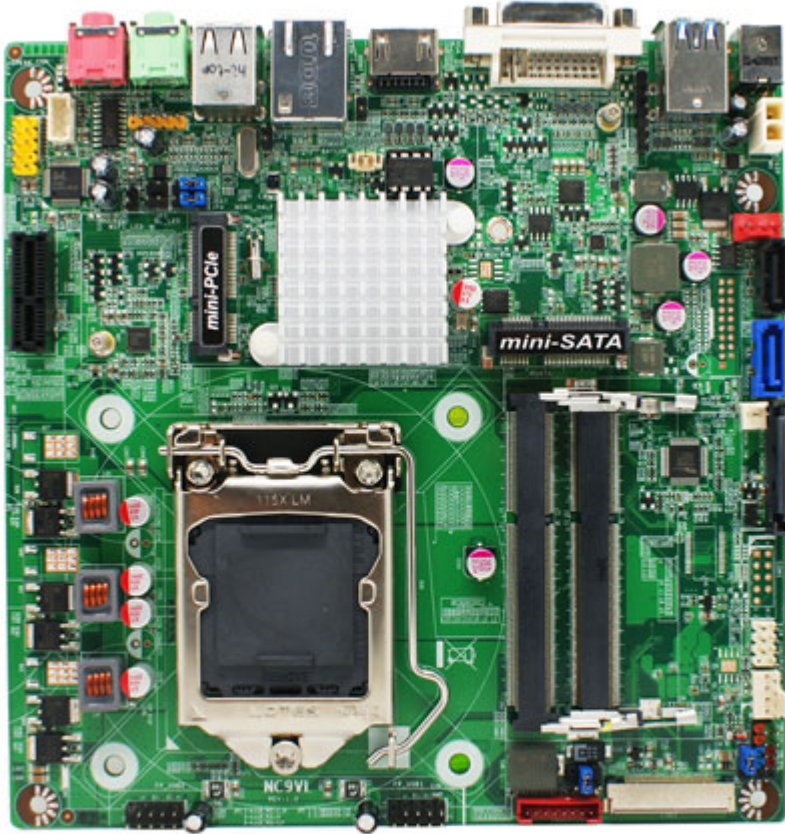

- Intel® H81 Chipset
- Supports Intel LGA 1150 Socket 4th Generation Core™ i3, i5, i7 & Pentium Processors
- 2 * Dual Channel SO-DIMM DDR3-1333/1600 up to 16GB
- 1*HDMI output
- Support CPU Smart FAN
- Supports 1 * Gigabit LAN
- Supports ACPI S3 Function
- Support Watch dog Technology
- Thin Mini ITX form factor

| | |
|-------------------------|---|
| CPU | • INTEL® LGA 1150 Socket 4th generation Core i7/i5/i3/Pentium Processor |
| Chipset | • INTEL® H81 Chipset |
| Memory | • 2 * SO-DIMM Sockets Dual Channel DDR3 1600/1333 SDRAM up to 16 GB |
| Expansion Slots | • 1 *PCIe x 1 • 1 * half size Mini PCI-E socket |
| Storage | • 1 * Serial ATA2 3Gb/s & 1 * Serial ATA3 6Gb/s connectors • 1 * full size mSATA socket (only mSATA) |
| Audio | • Realtek ALC662 6-Channel HD Audio CODEC |
| Ethernet LAN | • Intel i217LM Gigabit Ethernet LAN *1 |
| USB | • 6* USB 2.0/1.1 & 2 * USB3.0 |
| Special Features | • Support ACPI S3 • Support CPU Smart FAN • Support Watch Dog |

| | |
|-------------------------|---|
| • Rear Panel I/O | <ul style="list-style-type: none"> • 2 * USB 2.0/1.1 & 2 * USB 3.0 ports • 1 * HDMI • 1 * DVI-I port • 1 * 19V DC-in jack • 1 * RJ-45 port • 1 * MIC-in & 1 * Line-out jacks |
| • Internal I/O | <ul style="list-style-type: none"> • 2 * USB 2.0/1.1 headers • CPU /System Fan connectors; • 1 * PS/2 header • 1 * 24-bits Dual CH LVDS & 1 * Inverter connector • 1 * CIR header • 1 * AUDIO header • 1 * Speaker header • 1 * DMIC header • 1 * Front panel header • 1 * FPD Brightness connector • 1 * 2-pin ATX Power header • 1 * 2-pin open case header |
| • BIOS | • AMI 64Mb DIP Flash ROM |
| • Form Factor | • Thin Mini ITX Form Factor (170mm x 170mm) |
| • Functional | • ATM, POS, AIO, Panel PC, Digital Signage |
| • Certificate | • CE, FCC, RoHS |
| • Temperature | <ul style="list-style-type: none"> • Operating within 0-60 centigrade • Storage within -20-85 centigrade |